

ACR7x Series Magnetic Stripe Card Reader

Access' ACR7x family provides magnetic card reading with USB interface.

Description

The ACR75 and ACR76 magnetic stripe card readers are manual swipe readers of high and low coercivity magnetic cards. Intuitive to use, the ACR7x magnetic stripe readers (MSRs) read high or low coercivity magnetic cards in either swipe direction.

The ACR75 communicates as a USB Keyboard device and does not usually require a device driver to be installed. Configuration settings can be programmed and downloaded using Access IS SoftProg utility and stored within the reader. Header and terminators and data track selection and options to configure transmission of Start and Stop Sentinels and LRC data elements can be set.

The ACR76 installs with a Windows device driver. The driver interface allows users to choose data format as keyboard or serial data. In addition parsing options can be configured to allow specific fields of data to be tested and conditional output formatting or data extraction rules to be set. The rules are stored as a registry setting allowing an easy method for upgrade.



ACR7x magnetic strip card reader with black case



ACR7x in the pearl white case

Applications

- Point of sale credit and debit card transactions
- Access control and time management
- Loyalty schemes
- Club or library membership management
- Reading driving licences
- Computer security

Features

- USB interface
- Software configurable
- LED indication of read status
- Compact design
- Bidirectional swipe
- Optional mounting brackets enabling readers to be mounted at almost any angle

Access IS
18 Suttons Business Park
Reading, Berkshire
RG6 1AZ, United Kingdom
Tel: +44 (0) 118 966 3333
Fax: +44 (0) 118 926 7281

Access (North America) inc
PO Box 2569, Peachtree City
Georgia 30269-2569
USA
Tel: +1-770-631-8425
Fax: +1-678-364-8856

Access 
Interfacing Solutions


For further information email: sales@access-is.com or visit our website: www.access-is.com

All trademarks acknowledged. Specifications subject to change without prior notice. This literature is for outline information only.

Product Selector

Part Number	Pearl White Housing	Black Housing	Keyboard Emulation	Access Parsing Emulation
ACR75AB	Yes		Yes	
ACR75ABN		Yes	Yes	
ACR76AB	Yes			Yes
ACR76ABN		Yes		Yes

Dimensions

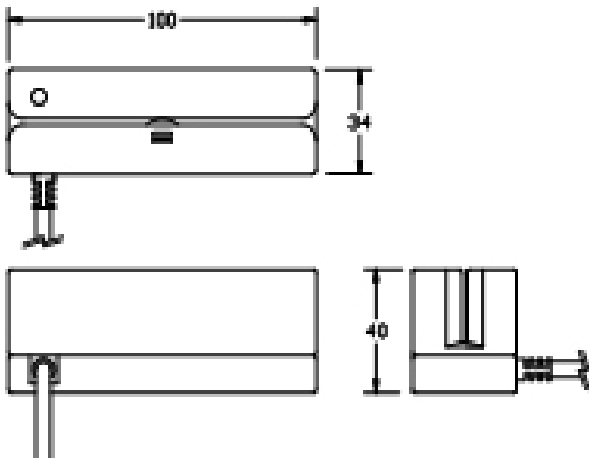

ACR7x Series Readers

Specifications

Performance

Card type : magnetic cards per ISO7810, ISO7811, AAMVA, JIS and custom data

Read capability: magnetic stripe 1, 2 or 3 track of low or high coercivity (300 - 4000 Oe)

Card thickness: 0.78 - 1.2 mm

Swipe speed: 5 to 55 inches/second

Read error rate: <0.5%

Magnetic head life: >500,000 swipe operations

General

Colour: Pearl white or black

Dimension: 100L x 34W x 28H mm

Weight: 120 g

Cable length: 1.75 m

Interfaces

Host interface: USB 1.1

Electrical specifications

Power requirement: +5 VDC (+/-10%)

Current consumption: 35 mA max

Environmental

Operating temperature: -10°C to 55°C

Storage temperature: -30°C to 70°C

Approvals

Safety: UL 1950 /IEC950

RF/EMI: EN 55022 Class B, FCC Part 15, Subpart B, class A, BSMI EMC Class B

Access IS
18 Suttons Business Park
Reading, Berkshire
RG6 1AZ, United Kingdom
Tel: +44 (0) 118 966 3333
Fax: +44 (0) 118 926 7281

Access (North America) inc
PO Box 2569, Peachtree City
Georgia 30269-2569
USA
Tel: +1-770-631-8425
Fax: +1-678-364-8856

Access 
Interfacing Solutions

For further information email: sales@access-is.com or visit our website: www.access-is.com

All trademarks acknowledged. Specifications subject to change without prior notice. This literature is for outline information only.