

## RP9000

BGR Printer for Check-in and Boarding Gates

### Simple and Reliable Receipt Printing

The RP9000 boarding gate receipt printer provides a simple and reliable means to print receipts at airport check-in and boarding gates. It can be used to facilitate seat assignment for passengers boarding with 2D barcoded boarding passes on home-printed documents or electronic media. In addition, it can be used to offer frequent flyer points receipts. As a plug-and-play accessory to the Access-IS range of boarding gate readers, the RP9000 is simple to deploy.



### Low Cost Check-in Printer

The RP9000 printer, via its USB interface, can also be employed as a low cost check-in printer. Using a supplied USB driver, boarding passes can be easily printed using Windows' spooler mechanism.



### Maximises Throughput

The compact design incorporates a large 90mm diameter paper roll, providing 92 metres of paper, which minimises operational disruption caused by roll changes, allowing for greater passenger throughput.

### Accessories

The quick release bracket for the RP9000 BGR printer provides a simple means to secure the printer to counter-tops or podiums, preventing it from being damaged or stolen and acting as a simple but effective deterrent to agents relocating the hardware.



## Device Features

### Connection Types

RS232

### Features

#### Passenger Experience

Simplifies passenger boarding, saving time

#### Large Capacity

92 metre paper roll capacity; >1100 passengers between changes

#### Easy Operation

Compact and rugged design with fast, quiet operation

#### Simple Integration

'Plug and play' with Access boarding gate reader

#### Saves Time

Eliminates 'cutting and sorting'

## Applications

- Printing boarding passes at check-in desk
- Seat assignment changes at the gate
- Seat assignment for passengers with electronic or home-printed documents
- Frequent flyer points receipts

### Printing Specification

Printing method: Thermal line printing

Resolution: 203 DPI

Printing speed: 220mm/s

Paper width: 80mm or 82.5mm

Roll dimension: Up to 90mm diameter with 92 metre standard length roll

### Interface

Interface options: RS232 to match printer port of Access-IS BGR range of devices

### Mechanical

Size (WxDxH): 140 x 208 x 152mm

Weight: 2000g

Colour: Grey

MTBF: 360,000 hours

### Power Supply

Supplied with external universal AC power supply, 100-240V, 50/60Hz

### Environmental

Temperature:

Operating: 0°C to 50°C



Storage 0°C to 60°C

Humidity: 0 to 95% RH, non-condensing

### Approvals

Safety approvals: EN60950

Agency approvals: CE, UL, TUV

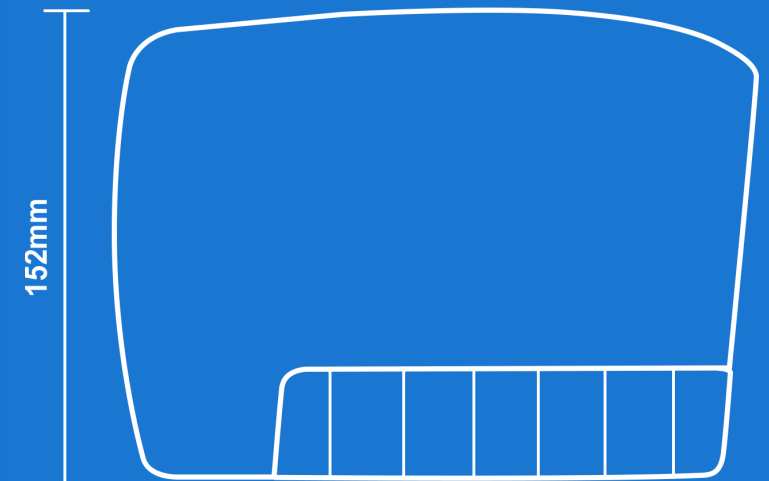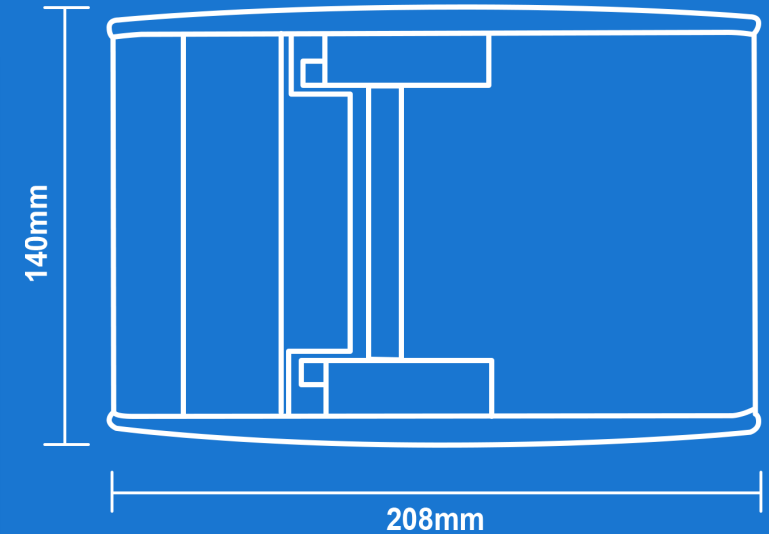

## Get In Touch

You can get in touch via our website at [access-is.com](http://access-is.com) or by phone and email:

+44 118 966 3333 [sales@access-is.com](mailto:sales@access-is.com)